




# Flex-Loc™ Torches

**THE STANDARD  
IN TIG WELDING**

Designed to give welders more versatility, the CK Flex-Loc™ torches are perfect for hard to reach welds and positions. The 360 degree rotating head locks at the desired angle for ultimate control.

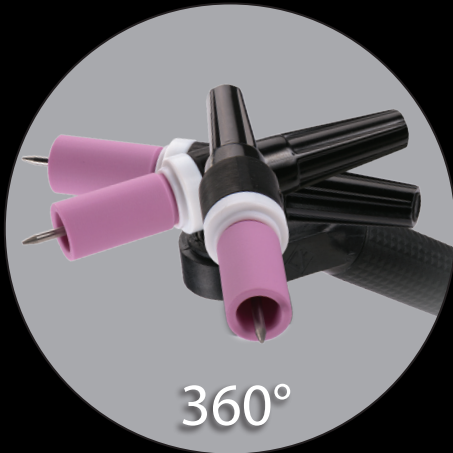

- 360 degree variable angle torch head
- Locks in any position
- Interchangeable torch head for quick setup changes
- Great for "walking the cup" on open root welds
- Ergonomic design for ultimate comfort and control

**CK Worldwide, Inc**  
P.O. Box 1636, Auburn, WA 98071 USA  
Phone: 1.800.426.0877  
Fax: 1.800.327.5038

Form 456  
[www.CKWORLDWIDE.com](http://www.CKWORLDWIDE.com)

Connect with us on:




# FLEX-LOC TORCH REPLACEMENT PARTS

## 2 SERIES

GAS-COOLED


FL130 AND FL130V

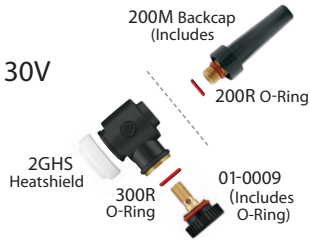

FL2L TORCH HEAD  
Comes complete with  
2GHS heatshield and  
01-0009 screw with  
O-Ring


FL130

FLTBA

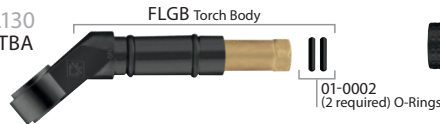

FL130V


FLTBAV

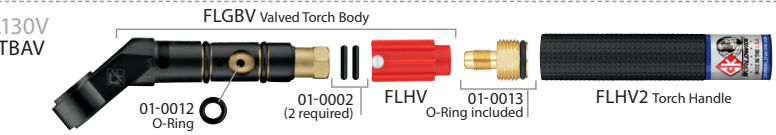

## 3 SERIES

GAS-COOLED


FL150 AND FL150V

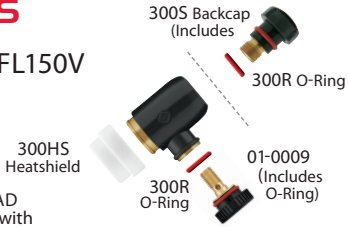

FL3L TORCH HEAD  
Comes complete with  
300HS heatshield and  
01-0009 screw with  
O-Ring


FL150

FLTBA

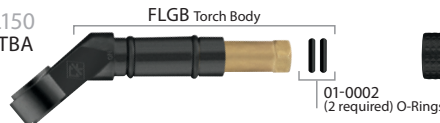

FL150V


FLTBAV

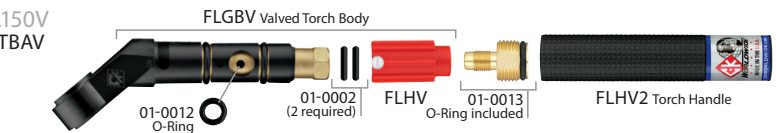

## 2 SERIES

WATER-COOLED


FL230

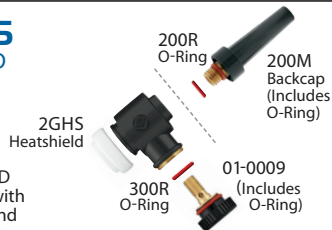

FL2L TORCH HEAD  
Comes complete with  
2GHS heatshield and  
01-0009 screw with  
O-Ring

FL230


FLTBAW

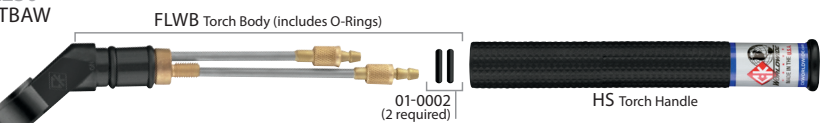

## 3 SERIES

WATER-COOLED


FL250

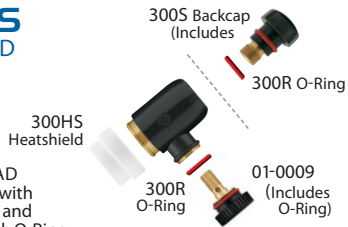

FL3L TORCH HEAD  
Comes complete with  
300HS heatshield and  
01-0009 screw with  
O-Ring

FL250

FLTBAW

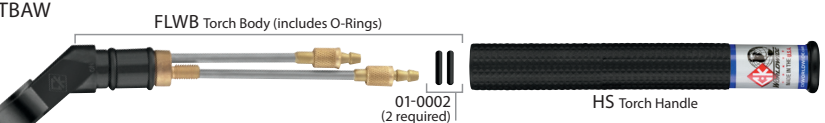

FL130 & FL130V (130amps)					FL150 & FL150V (150amps)				
Head Style	Cable	Cable Length	Standard	Super-Flex™	Head Style	Cable	Cable Length	Standard	Super-Flex™
FL2L	1 Piece	12 1/2 ft. (3.8m)	FL1312	FL1312SF	FL3L	1 Piece	12 1/2 ft. (3.8m)	FL1512	FL1512SF
		25 ft. (7.6m)	FL1325	FL1325SF			25 ft. (7.6m)	FL1525	FL1525SF
FL2L w/ valve	1 Piece	12 1/2 ft. (3.8m)	FL1312V	FL1312VSF	FL3L w/ valve	1 Piece	12 1/2 ft. (3.8m)	FL1512V	FL1512VSF
		25 ft. (7.6m)	FL1325V	FL1325VSF			25 ft. (7.6m)	FL1525V	FL1525VSF

FL230 (230amps) & FL250 (250amps)				
Head Style	Cable	Cable Length	Standard	Super-Flex™
FL2L	TriFlex or Super-Flex™	12 1/2 ft. (3.8m)	FL2312	FL2312SF
		25 ft. (7.6m)	FL2325	FL2325SF
FL3L	TriFlex or Super-Flex™	12 1/2 ft. (3.8m)	FL2512	FL2512SF
		25 ft. (7.6m)	FL2525	FL2525SF

**CK Worldwide, Inc**  
 P.O. Box 1636, Auburn, WA 98071 USA  
 Phone: 1.800.426.0877  
 Fax: 1.800.327.5038

Form 456  
[www.CKWORLDWIDE.com](http://www.CKWORLDWIDE.com)

Connect with us on:

